


NUC-C3 J3060

Intel® Celeron® J3060 Dual Core Processor
Micro Firewall Appliance



Features:


- ◇ All aluminum structure, fanless design; ;
- ◇ Onboard Intel Celeron J3060 processor;
- ◇ Max.Support DDR3L 1600 8G RAM;
- ◇ Support 2*MINI PCI-E Slot;
- ◇ Support 2*HDMI;
- ◇ Support 2*Intel 1000M LAN;
- ◇ Support OS:



Specification

Model	NUC-C3
Color	Black (Color can be customized)
Material	High-quality all aluminum, surface anodic oxidation
Processor	Intel Celeron J3060 (dual core dual threads, 1.6 GHz, Max turbo 2.48GHz)
RAM	Support 1*DDR3L 1600MHz SODIMM RAM Slot, Max turbo 8GB
Display Chip	Integrated Intel HD Graphics
Display Port	2*HDMI (Support synchronous/asynchronous dual display)
Front I/O	1*Power Switch, 1*Audio (Support Mic and Speaker at the same time), 2*USB3.0, 1*RJ45 COM (Support Console Function), 2*HDMI
Rear I/O	2*RJ45 LAN, 4*USB2.0, 1*DC Input
Expansion Slot	Support 1*MINI PCIE Slot (WIFI/Bluetooth Optional) Support 1*MINI PCIE Slot (Support MSATA)
Network	2*Intel i211-AT 1000M LAN
Storage	1*MSATA Slot
Input Voltage	Support DC 12V Input
Other Function	Auto power on when there is electricity、 Timing boot、 Wake on LAN、 PXE boot、 Watchdog (0~255 level) (Standard version doesn't set these function)
Work Temp	0℃ ~ +50℃ (Commercial HDD), -20℃ ~ +50℃ (Industrial SSD), Surface air flow
Work Humidity	5% ~ 95% non-condensing
Certificates	CE、 CCC、 FCC Class A、 ROHS
Dimension	115 * 107.5 * 39mm
Net Weight	0.5kg
Application	Business Office, HD Video Playback, Home Learning, Router, Network Security etc.

NUC-C3 J3060 Drawing

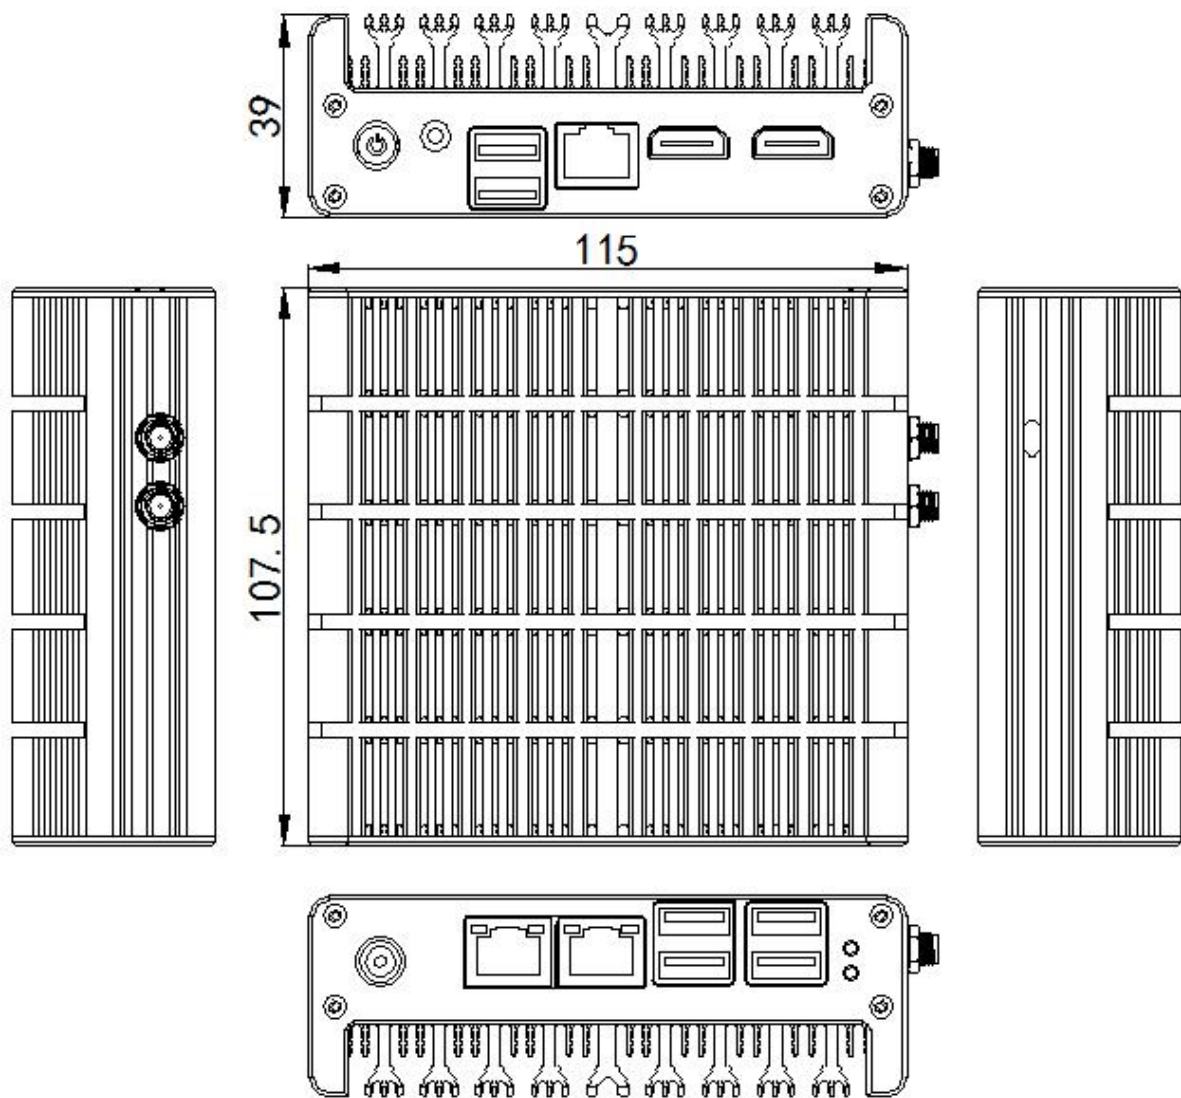

Accessories List

Name	Quantity	Specification
Power Adapter	1	12V 4A
Power Cord	1	Any Plug Optional (China, US, EU, UK etc.)
VESA Bracket	1	Standard

Order Information

Configuration 1	NUC-C3 J3060	Intel Celeron J3060	Standard Port, 2*LAN, 6*USB
-----------------	--------------	---------------------	-----------------------------